


## Griffin System Components

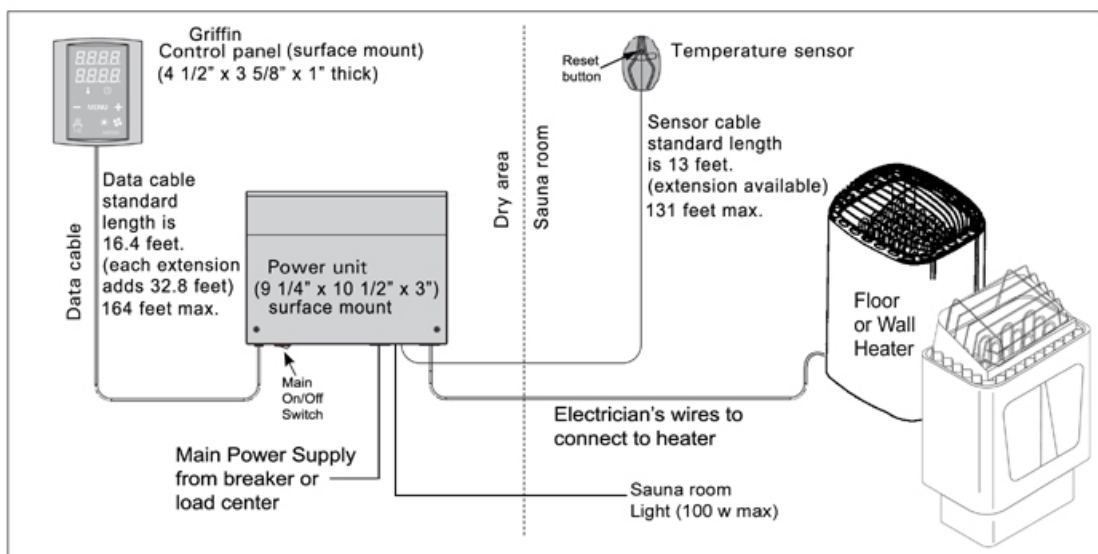

## Griffin Control component specs

### Griffin Control

Griffin control size is 4 1/2" h x 3 5/8" w x 1" d

Surface mount, not flush mount

Griffin control has 60 min. timer plus 10 min. to 12 hour time delay feature in 10 min. increments.

Fahrenheit/Celcius readings

Can change maximum on time from 1 to 18 hours or 24 hour continuous mode (for commercial only)

Can work in conjunction with a separate programmable 7 day timeclock (commercial only)

### Power Unit

Contactor (Power Unit) box size is 9 1/4" h x 10 1/2" w x 3" d for CG170-U1 and CG170-U3

Power Unit size is 10 3/4" h x 10 1/2" w x 3" d for CG170-U3-15

Surface mount, not flush mount

Power on/off switch

**Data Cable** (connects from power unit to Griffin control)

Standard length is 5m (16.4 feet) long, max is 50m (164 feet)

Cable extension is 10m (32.8 feet)

Data Cable + Extension = 49.2 feet Multiple Extensions can be added to it.

**Temperature Sensor** (connects to power supply)

Standard length is 4m (13 feet) long, max is 40m (131 feet)

